


Accurate

TOILET PARTITIONS TO EVERY SPECIFICATION AND EXPECTATION






*PHENOLIC
STAINLESS STEEL
SOLID PLASTIC
PLASTIC LAMINATE
POWDER COATED*

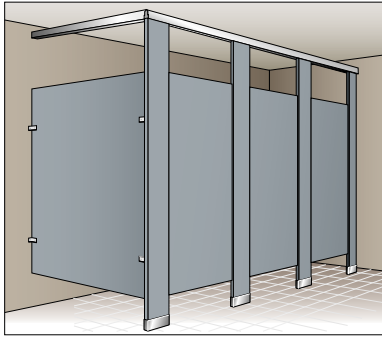



Floor Anchored/Overhead Braced

This most economical yet most desirable installation style is recommended for use with lighter weight concrete and plywood floors. An anodized aluminum antigrip headrail secures partitions firmly.

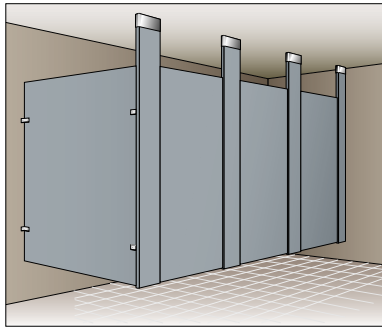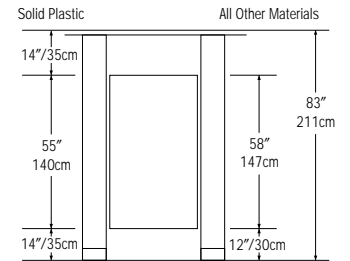



Ceiling Hung

Open design provides unobstructed floor area for clean look and economical maintenance. When used together with wall-hung fixtures, the entire floor is accessible for efficient cleaning. Structural steel ceiling supports are necessary to assure proper installation.

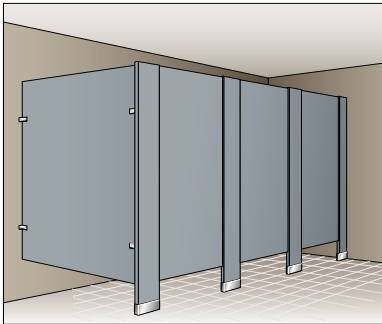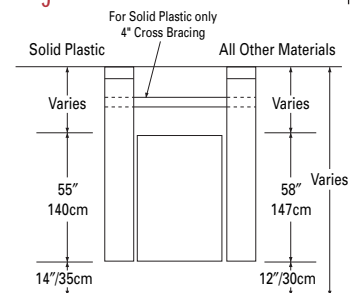


Floor Anchored

Flush top line gives modern, contemporary appearance – especially suitable for low-ceilinged washrooms. Simplified construction permits ease of installation anywhere. For concrete floors only: 2" minimum penetration into floor required.

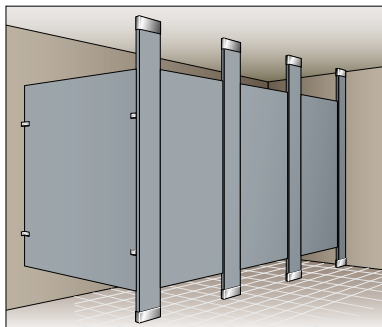

Floor-to-Ceiling Anchored

Recommended for busy washrooms where abusive treatment is possible and vandal resistance is critical. This construction style is extremely stable and durable since pilasters are anchored into both the concrete floor and the structural ceiling support.




Accurate

Configurations for every construction requirement.

Accurate Toilet Partitions offer flexible solutions for every installation requirement and environment. Four design styles are

available in an assortment of materials: durable solid plastic, economical plastic laminate, rugged phenolic, modern stainless steel and tough powder coated steel provide solutions for every budget.

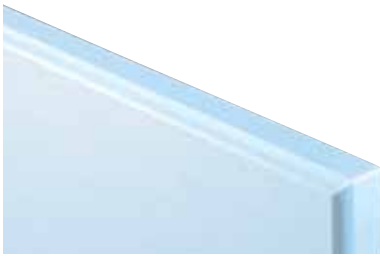

Solid Plastic

The ideal choice for busy public facilities, high density polyethylene (HDPE) polymer is highly resistant to stains, common acids and cleaning agents, as well as moisture, steam, and corrosion. Solid Plastic never needs painting and will not easily dent or chip. Available in Floor Anchored/Overhead Braced, Ceiling Hung, and Floor-to-Ceiling Anchored styles in a variety of decorator colors.




Plastic Laminate

Combines design flexibility with aesthetic appeal and economy. All the proven benefits of high pressure laminate are built-in, featuring a smooth surface, resistant to grease and stains. Available in a complete complement of designer colors that coordinate attractively with other washroom accessories. Available in all four design styles.



Phenolic - Black Core

Impact, moisture, and corrosion resistant, the surfaces are smooth and easy to clean. Phenolic partitions are compression molded and ideal for extreme moisture conditions in showers, pools, and saunas, or when maintenance includes hosing down washrooms. Available in all four design styles in a full array of colors, with attractive black edges.

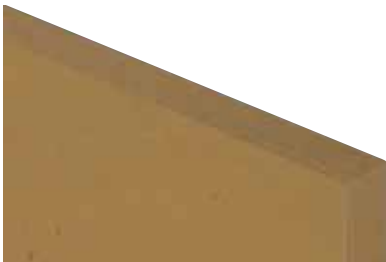

Phenolic - Color-Thru

Phenolic Color-Thru adds value to regular Phenolic, with constant color from the surface--through and through. That makes it especially effective for impact, scratch and graffiti resistance. It also has excellent screw holding power and all the advantages of traditional Phenolic performance. Available in a choice of attractive colors and styles, affording full flexibility in design and application.



Stainless Steel

The gleaming beauty of stainless steel provides exceptional durability and modern styling. A honeycomb core is glued under pressure to #304 stainless steel sheets and then assembled with roll formed crown molding. The corners are welded and ground smooth for extra strength. Available in all styles in #4 satin or textured finish.



Powder Coated Steel


The industry standard. Hybrid epoxy/polyester powder coated finish in a variety of designer colors over galvanized steel is fabricated with roll formed crown molding and a honeycomb core. Accurate's economical powder coated steel is available in all four design styles.

Accurate Solid Plastic

ACCURATE solid plastic partitions are designed for high-traffic public facilities, parks and schools. It is the material of choice where low maintenance and durability are required. Solid plastic is attractive as well as environmentally safe and sanitary. It is water resistant and unaffected by steam or high humidity. Commercial cleaning agents may be used without fear of damaging the surface.

ACCURATE solid plastic partitions are manufactured of high-density polyethylene (HDPE) resins with homogeneous color throughout and smooth, machined edges. Accurate Solid Plastic meets Class B flammability ratings. The aluminum heat sink strip at bottom edges of doors and panels is a standard construction feature. Available in floor anchored/overhead braced, ceiling hung, and floor-to-ceiling anchored styles.

COLOR SELECTION

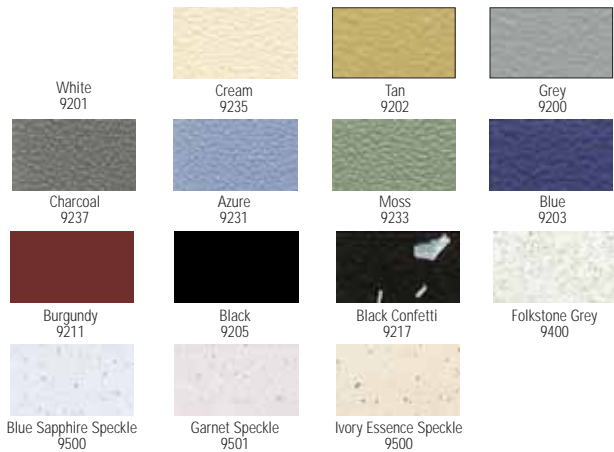

Actual Colors will vary from those shown do to limitations in printing process.
Please make final color selection from available color samples.



FAST TRACK: 10 WORKING DAYS.


Compartment limits apply.
Any standard color - in all three styles.

OPTIONAL PLASTIC SHOES feature a clean style that looks great, is easy to install, and is easy to maintain.

OPTIONAL PLASTIC FULL LENGTH BRACKETS provide great looks with maximum strength and durability.


To match or complement your Accurate partitions, plastic brackets and shoes are available in the following colors: White, Cream, Tan, Black, Charcoal, Gray, Blue, Azure, Moss, and Burgundy.

CONSTRUCTION FEATURES




MOUNTING SYSTEM

Simplified pilaster-to-floor mounting. Mounting bolts adjust height and level pilasters by turning the lock nut adjusters.




55" HIGH DOORS AND PANELS

Allows 14" clearance from floor.



INTEGRAL HINGES

Installer friendly. Door is not preset or assembled at the factory. Eliminates the need to handle heavy, unwieldy components on site.



EMERGENCY ACCESS


Meets ADA requirements. Slotted keeper coupled with gravity hinges allow emergency access with a simple lift and pull.



VANDAL-RESISTANT FASTENERS

Special driver allows easy installation and virtually eliminates unauthorized removal. Stainless steel fasteners are standard on all solid plastic partitions.

Options:



VAULT-TYPE HINGE

Rugged, attractive wrap-around hinge. Extra strong for heavy-duty installations.

- Stainless Steel Trim Shoes
- Full Height Aluminum Brackets
- Full Height Stainless Steel Brackets
- Full Height Piano Hinges
- 8" Aluminum Wrap-around Hinges
- 6" Aluminum Strike

ACCURATE plastic laminate partitions combine design flexibility with affordable cost. The high pressure laminate finishes, bonded under pressure to a solid impact-resistant particle board core, meet or exceed all NEMA standards. Edge banding of all components prior to face lamination ensures optimum water runoff and durability.

ACCURATE plastic laminate is available in all four installation styles and a variety of designer colors to complement vanities and counter tops. They are the finish of choice for commercial and institutional installations where aesthetics are essential.




COLOR SELECTION




CONSTRUCTION FEATURES




SOLID CORE
45# high density particleboard to resist warping and ensure surface smoothness.




EDGE CONSTRUCTION
Face laminate overlaps edge banding to ensure water runoff and deter vandalism.



DOOR HINGES
Full weight-bearing hinges on both top and bottom of each door. Wrap-around mounting and through bolting for safety.



SHOE CONSTRUCTION
Stainless steel, double-hemmed, trim shoe with #4 satin finish conceals mounting fastener and hardware.



VANDAL-RESISTANT FASTENERS
Special driver installs fasteners which virtually eliminates unauthorized removal and ensures easy installation.

*Directional Pattern - Pattern on panels over 60" wide will run perpendicular to pattern on doors and pilasters.

Actual Colors will vary from those shown due to limitations in printing process. Please make final color selection from available color samples.

FAST TRACK: 10 WORKING DAYS
Compartment limits apply.
Any standard color - in all four styles.

Options:

Steel Core Pilasters
Plywood Core
Stainless Steel Hardware
Full Height Brackets
Full Height Piano Hinges

Phenolic - Black Core




FAST TRACK: 10 WORKING DAYS.
Compartment limits apply.
Any standard color - in all four styles.


ACCURATE phenolic partitions are the material of choice where durability and strength are required. These partitions are fabricated to stand the test of time. The dense components, combined with stainless steel brackets and fasteners, stand up to the most extreme conditions of moisture and humidity. Phenolic is impact, water, and corrosion resistant, and does not support bacteria.

The phenolic partition is decoratively faced on both sides as an integral part of a resin-impregnated kraft paper core. The surface sheets are fused at high temperature and pressure. In addition to strength and serviceability, a wide range of colors provides limitless design flexibility. ACCURATE phenolic partitions are available in all four design styles.


CONSTRUCTION FEATURES




EMERGENCY ACCESS
Meets ADA requirements. Slotted keeper coupled with gravity hinges allow emergency access with a simple lift and pull.



SHOE CONSTRUCTION
Stainless steel, double-hemmed, trim shoe with #4 satin finish conceals mounting fasteners and hardware.



VAULT-TYPE HINGE
Rugged, attractive wrap-around hinge. Extra strong for heavy-duty installations.



VANDAL-RESISTANT FASTENERS
Special driver installs fasteners, virtually eliminating unauthorized removal, and ensuring easy installation. Stainless steel fasteners are standard for phenolic partitions.

COLOR SELECTION



3010
Dove Gray



4000
Almond



1130
Neutral Glace



4410
Natural Canvas



3000
Silver Gray



3300
Folkstone Celesta




6035
Hunter Nebula



3320
Graphite Grafix



5000
Burgundy



3330
Ebony Granite

Actual Colors will vary from those shown do to limitations in printing process. Please make final color selection from available color samples.

Options:

Class "A" Fire Rated Material
Full Height Piano Hinges
Full Height Stainless Steel Brackets

Phenolic - Color-Thru

7

ACCURATE Phenolic Color-Thru has surface color through and through, to help diminish damage from vandalism, and even discourage it. This is in addition to the strength, durability and low maintenance which has made regular phenolic the partition of choice. Color-Thru comes in five attractive colors and is available in all four design styles.

COLOR SELECTION



6260C
Sea Spray



4350C
Camel



5350C
Red Clay



6350C
Moss



2000
Black

Actual Colors will vary from those shown do to limitations in printing process.
Please make final color selection from available color samples.



FAST TRACK: 10 WORKING DAYS.

Compartment limits apply.

Any standard color - in all four styles.

Accurate Privacy & Urinal Screens

Post-to-Ceiling



POST-TO-CEILING SCREENS

Post is 1-3/4" sq. by
10' satin
finish aluminum.

Shown with option-
al third set of stir-
rup brackets.

Accurate privacy and urinal screens are easy to maintain. Available in three installation configurations, and in a selection of six materials: solid plastic, plastic laminate, phenolic-black core, phenolic-color-thru, stainless steel, and powder coated steel.

Accurate styles include post-to-ceiling, floor anchored, and wall hung screens.

Floor Anchored

FLOOR ANCHORED SCREENS

Pilaster is 6" wide.
Panels are 58"
high by depth
required.



Wall Hung

WALL HUNG SCREENS

Available in 3 standard
sizes:
12" x 42", 18" x 42",
24" x 42"

Shown with optional
full height aluminum
brackets.






ACCURATE stainless steel toilet partitions are highly resilient and retain their gleaming beauty for years. The partitions are composed of strong #304 stainless steel with a #4 satin or textured finish, formed and bonded under pressure to a sound-deadening honeycomb core. The face sheets are held rigid and permanently in place by an interlocking strip welded at each corner.

ACCURATE stainless steel is corrosion resistant and impervious to just about any substance. Scratches caused by acts of vandalism can be removed by buffing. The elegance of ACCURATE stainless steel will enhance and complement any design scheme.

TEXTURED FINISH




An extra measure of protection against vandalism.

A variety of patterns are offered.


Options:

Plywood Core
Stainless Steel Hardware
Full Height Brackets
Full Height Piano Hinges
Textured Finishes


CONSTRUCTION FEATURES FOR




PILASTER MOUNTING
Pilaster adjustments, with floor-mounted jack-leveling device are used on floor-anchored/overhead braced pilasters.



ALTERNATE PILASTER MOUNTING
This type of mounting is furnished on all ceiling hung and floor anchored pilasters.



SHOE CONSTRUCTION
Stainless steel, double-hemmed, trim shoe with #4 satin finish conceals mounting fasteners and hardware.




HONEYCOMB CORE
Core is made of cellular honeycomb. This type of core provides strong construction.

ACCURATE pioneered the use of powder coated steel toilet partitions which have become the standard for durable quality at an affordable price. The finish is resistant to wear, fading, and scuffing. It is easily cleaned with a mild soap solution and wiped dry.

The hybrid epoxy/polyester powder is electrostatically applied for uniform thickness over cold-rolled commercial quality (CRCQ) galvanized, stretcher-leveled steel. The core is made of cellular honeycomb for solid construction and sound attenuation. It is bonded to the formed steel with a non-toxic adhesive and locked in place with a roll formed molding and brazed corners.

COLOR SELECTION

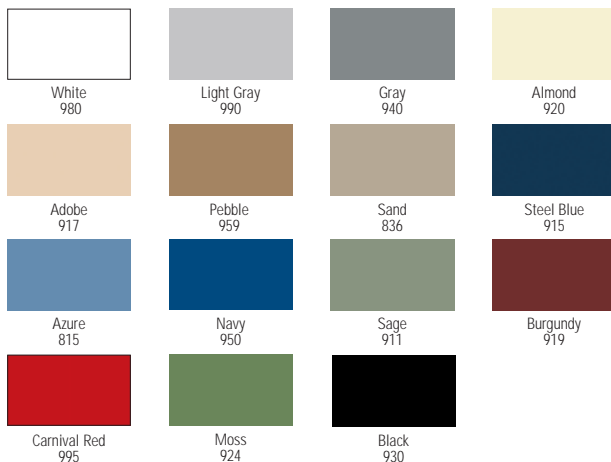

TEXTURED FINISHES



Actual Colors will vary from those shown do to limitations in printing process.
Please make final color selection from available color samples.



ACCURATE EXPRESS: 48 Hour Shipping

Compartment limits apply.


In White, Light Gray, Gray, Almond and Azure for floor anchored/overhead braced style only.

FAST TRACK: 10 WORKING DAYS


Compartment limits apply.

Any standard color for floor anchored/overhead braced style.


STAINLESS STEEL AND POWDER COATED




CONCEALED LATCH
With emergency access and ADA paddle handle.



BRAZED/ WELDED CORNERS
All powder coated steel corners are brazed. All stainless steel corners are welded.



VANDAL - RESISTANT FASTENERS
Special driver installs fasteners which virtually eliminates unauthorized removal and ensures easy installation.



UPPER DOOR BRACKET
Bracket is an internal part of the door. A pin goes through door and bracket for three-point bearing and operates in a nylon bushing in upper hinge bracket .


Specifications

	Solid Plastic Partitions Floor Anchored/Overhead Braced Mounting Style	Plastic Laminate Partitions Floor Anchored/Overhead Braced Mounting Style	Phenolic-Black Core Partitions Floor Anchored/Overhead Braced Mounting Style
PART 1: GENERAL	<p>1.01 Work Included A- The toilet partitions shall be high-density polyethylene (HDPE) polymer with floor anchored/overhead braced mounting style as manufactured by Accurate Partitions Corp., Lyons Illinois. B- Furnish all labor and materials necessary for completion of work in this section as shown in the approved drawings and specified herein.</p> <p>1.02 Related Work—Specified elsewhere shall include accessories and anchorage/blocking for attachment of partitions.</p>	<p>1.01 Work Included A- The toilet partitions shall be plastic laminate with floor anchored/overhead braced mounting style as manufactured by Accurate Partitions Corp., Lyons Illinois. B- Furnish all labor and materials necessary for completion of work in this section as shown in the approved drawings and specified herein.</p> <p>1.02 Related Work—Specified elsewhere shall include accessories and anchorage/blocking for attachment of partitions.</p>	<p>1.01 Work Included A- The toilet partitions shall be phenolic material with floor anchored/overhead braced mounting style as manufactured by Accurate Partitions Corp., Lyons Illinois. B- Furnish all labor and materials necessary for completion of work in this section as shown in the approved drawings and specified herein.</p> <p>1.02 Related Work—Specified elsewhere shall include accessories and anchorage/blocking for attachment of partitions.</p>
PART 2: PRODUCT	<p>2.01 Doors, Panels, Pilaster and Urinal Screens—Shall be 1" thick (door and panels 55" high, pilasters 82" high) HDPE polymer that is water resistant and non-absorbent. A heat sink shall be attached to the bottom of all doors and panels.</p> <p>2.02 Material—The HDPE material shall have homogenous color throughout each component with edges machined to a 1/4" radius. Self-lubricating surface shall resist markings from pens, pencils and other writing instruments.</p> <p>2.03 Color—Will be selected from Accurate's full range of standard designer colors.</p> <p>2.04 Door Hardware—Shall include Accurate heavy duty wraparound cam-action hinge set that permits door to return to a pre-set position when not locked. Hinges, strike, and keeper shall be die-cast Zamac with brushed finish to resist corrosion, and shall be through bolted with vandal resistant barrel nuts and shoulder screws. Hinge and slide latch assembly shall allow emergency access by lifting the door from the bottom.</p> <p>2.05 Mounting Hardware—Panel brackets shall be 54" long extruded aluminum with 6 through bolt panel attachment points and satin finish. Panels shall be through bolted with vandal resistant barrel nuts and shoulder screws.</p> <p>2.06 Construction Design—Partitions shall be anchored to the floor by a 1/4" x 1" stainless steel mounting bar attached to the bottom of the pilaster. Each mounting bar shall be anchored to the floor with 3/8" zinc plated bolts. Floor anchoring system shall be concealed by stainless steel shoes. Aluminum headrail with anti-grip profile shall provide overhead bracing and span all partitions and brace the end pilaster to the back wall.</p>	<p>2.01 Doors, Panels and Urinal Screens—Shall have a finished thickness of 1" with decorative plastic laminate applied to 7/8" thick particleboard.</p> <p>2.02 Pilasters—Shall have a finished thickness of 1 1/4" with decorative plastic laminate applied to 1 1/8" thick particleboard.</p> <p>2.03 Material—Doors, panels, pilasters and urinal screens shall be fabricated from 45-pound density, resin impregnated 7/8" thick particleboard. Decorative plastic laminate shall be applied to the particleboard with a non-toxic, water resistant adhesive under high pressure. All components shall be edge banded prior to face lamination to ensure moisture run-off and vandal resistance.</p> <p>2.04 Finish—All components shall have faces and edges covered with a decorative, vertical grade (.050 thickness) laminate.</p> <p>2.05 Color—Will be selected from Accurate's full range of standard designer colors.</p> <p>2.06 Door Hardware—Shall be Accurate cam-action hinge that permits door to return to a pre-set position when not locked. Hinge, strike and keeper shall be chromium plated Zamac to resist corrosion and through bolted with vandal resistant barrel nuts and shoulder screws. Cam-action hinge shall allow emergency access by lifting the door from the bottom.</p> <p>2.07 Mounting Hardware—Chrome plated Zamac stirrup brackets shall be secured to walls and pilasters with tamper resistant fasteners. Panels shall be through bolted with tamper resistant barrel nuts and shoulder screws.</p> <p>2.08 Construction Design—Partitions shall be anchored to the floor with 1/4" x 1" steel mounting bar attached to the bottom of the pilaster. Each mounting bar shall be secured to the floor with 3/8" zinc plated bolts. Floor anchoring system shall be concealed by a type 304 stainless steel trim shoe with a #4 finish. Aluminum headrail with anti-grip profile shall provide overhead bracing and span all partitions and brace the end pilaster to the back wall.</p>	<p>2.01 Doors and Pilasters—Shall be 3/4" thick solid phenolic core and decorative surface sheet on both faces.</p> <p>2.02 Panels and Urinal Screens—Shall be 1/2" thick solid phenolic core and decorative surface sheet on both faces.</p> <p>2.03 Material—Doors, panels, pilasters and urinal screens shall be fabricated from phenolic material comprised of multiple layers of melamine resin impregnated kraft paper, and a decorative surface sheet on both faces. All layers shall be fused together under high temperature and pressure.</p> <p>2.04 Finish—All components shall be water-resistant. Edges shall be machine finished with chamfered edges and black finish.</p> <p>2.05 Color—Shall be selected from Accurate's full range of standard designer colors.</p> <p>2.06 Door Hardware—Shall include Accurate heavy duty wraparound cam-action hinge set that permits door to return to a pre-set position when not locked. Hinges, strike, and keeper shall be die-cast Zamac with brushed finish to resist corrosion, and shall be through bolted with vandal resistant barrel nuts and shoulder screws. Hinge and slide latch assembly shall allow emergency access by lifting the door from the bottom.</p> <p>2.07 Mounting Hardware—Stainless steel stirrup brackets with brushed finish shall be secured to walls and pilasters with stainless steel vandal resistant fasteners. Panels shall be through bolted with tamper resistant barrel nuts and shoulder screws.</p> <p>2.08 Construction Design—Partitions shall be anchored to the floor with 1/4" x 1" stainless steel mounting bar attached to the bottom of the pilaster. Each mounting bar shall be secured to the floor with 3/8" zinc plated bolts. Floor anchoring system shall be concealed by a type 304 stainless steel trim shoe with a #4 finish. Aluminum headrail with anti-grip profile shall provide overhead bracing and span all partitions and brace the end pilaster to the back wall.</p>
PART 3: EXECUTION	<p>3.01 Installation—Shall be installed in accordance to the Accurate installation instructions with partitions rigid, straight and plumb. Doors and panels shall be mounted 14" above the finished floor.</p> <p>3.02 Warranty—Accurate Partitions Corp. guarantees its solid plastic HDPE partitions against breakage, corrosion, and delamination for 15 YEARS from the date of receipt by the customer. If material is found defective during that period, the material shall be replaced free of charge. No credits or allowances shall be issued for any labor or expenses relating to the replacement of components covered under the warranty plan.</p>	<p>3.01 Installation—Shall be installed in accordance to the Accurate installation instructions with partitions rigid, straight and plumb. Doors and panels shall be mounted 12" above the finished floor.</p> <p>3.02 Warranty—Accurate Partitions Corp. guarantees its plastic laminate partitions, properly maintained, against discoloration or delamination for 2 YEARS from the date of receipt by the customer. If material is found defective during that period, the material shall be replaced free of charge. No credits or allowances shall be issued for any labor or expenses relating to the replacement of components covered under the warranty plan.</p>	<p>3.01 Installation—Shall be installed in accordance to the Accurate installation instructions with partitions rigid, straight and plumb. Doors and panels shall be mounted 12" above the finished floor.</p> <p>3.02 Warranty—Accurate Partitions Corp. guarantees its phenolic partitions, properly maintained, against delamination, breakage or corrosion for 10 YEARS from the date of receipt by the customer. If material is found defective during that period, the material shall be replaced free of charge. No credits or allowances shall be issued for any labor or expenses relating to the replacement of components covered under the warranty plan.</p>

	Phenolic-Color-Thru Partitions Floor Anchored/Overhead Braced Mounting Style	Stainless Steel Partitions Floor Anchored Overhead/Braced Mounting Style	Powder Coated Steel Partitions Floor Anchored/Overhead Braced Mounting Style
PART 1: GENERAL	<p>1.01 Work Included A - The toilet partitions shall be "COLOR- THRU" phenolic material with floor anchored/overhead braced mounting style as manufactured by Accurate Partitions Corp., Lyons, Illinois. B - Furnish all labor and materials necessary for completion of work in this section, as shown in the approved drawings and specified herein.</p> <p>1.02 Related Work—Specified elsewhere, shall include accessories and anchorage/blocking for attachment of partitions.</p>	<p>1.01 Work Included A- The toilet partitions shall be stainless steel with floor anchored/overhead braced mounting style as manufactured by Accurate Partitions Corp., Lyons, Illinois. B- Furnish all labor and materials necessary for completion of work in this section as shown in the approved drawings and specified herein.</p> <p>1.02 Related Work—Specified elsewhere shall include accessories and anchorage/blocking for attachment of partitions.</p>	<p>1.01 Work Included A- The toilet partitions shall be powder coated steel with floor anchored/overhead braced mounting style as manufactured by Accurate Partitions Corp., Lyons, Illinois. B- Furnish all labor and materials necessary for completion of work in this section as shown in the approved drawings and specified herein.</p> <p>1.02 Related Work—Specified elsewhere shall include accessories and anchorage/blocking for attachment of partitions.</p>
PART 2: PRODUCT	<p>2.01 Doors and Pilasters—Shall be solid phenolic core with decorative surface sheet on both faces and an overall thickness of 3/4". Phenolic core color shall be the same as the decorative surface sheets.</p> <p>2.02 Panels and Urinal Screens—Shall be solid phenolic core with decorative surface sheet on both faces and an overall thickness of 1/2". Phenolic core color shall be the same as the decorative surface sheets.</p> <p>2.03 Material—Doors, panels, pilasters and urinal screens shall be fabricated from phenolic material comprised of multiple layers of resin-impregnated kraft paper with a decorative surface sheet on both faces. Kraft paper, phenolic resin and decorative face sheets shall all be the same color and shall be fused together under high temperature and pressure.</p> <p>2.04 Finish—All components shall be water-resistant. All edges shall be the same color as the face sheets and machine-finished with chamfered edges.</p> <p>2.05 Color—Shall be selected from Accurate's full range of designer COLOR- THRU phenolic colors.</p> <p>2.06 Door Hardware—Shall be gravity cam-action hinge that permits door to return to a pre-set position when not locked. Hinge, strike and keeper shall be cast stainless steel or Zamac with brushed finish to resist corrosion, and shall be through-bolted to doors and pilasters with vandal-resistant stainless steel shoulder screws and barrel nuts. Cam-action hinge shall allow emergency access by lifting the door from the bottom.</p> <p>2.07 Mounting Hardware—Cast stainless steel or Zamac stirrup brackets with brushed finish shall be secured to walls and pilasters with vandal-resistant stainless steel fasteners. Panels shall be through-bolted with vandal-resistant stainless steel shoulder screws and barrel nuts.</p> <p>2.08 Construction Design—Partitions shall be anchored to floor by 1/4" x 1" stainless steel mounting bar attached to the bottom of each pilaster. Each mounting bar shall be secured to floor with 3/8" zinc plated bolts. Floor anchoring system shall be concealed by a type 304 stainless steel trim shoe with a #4 finish. Aluminum headrail with anti-grip profile shall provide overhead bracing and span all partitions and brace the end pilaster to the back wall.</p>	<p>2.01 Doors, Panels, and Urinal Screens—Shall be 1" thick and fabricated from tension leveled 22 gauge type 304 stainless steel with a # 4 finish bonded to sound deadening honeycomb core.</p> <p>2.02 Pilasters—Shall be 1 1/4" thick, 82" high, and fabricated from tension leveled 22 gauge type 304 stainless steel with a # 4 finish bonded to sound deadening honeycomb core.</p> <p>2.03 Material—Doors, panels, pilasters, and urinal screens shall be manufactured with a resin impregnated honeycomb core that is bonded under pressure to the stainless steel with a non-toxic adhesive to ensure solid construction and sound attenuation. All the stainless steel components shall be assembled with a continuous roll-formed interlocking, 22-gauge stainless steel crown molding welded and ground smooth at the corners.</p> <p>2.04 Finish—All components shall be 304 stainless steel with a # 4 finish and include a PVC film for protection during shipment and installation.</p> <p>2.05 Door Hardware—Shall include bottom hinge with adjustable cam that permits door to return to a pre-set position when not locked. Hinge, strike and keeper shall be chromium plated Zamac to resist corrosion and through bolted with vandal resistant barrel nuts and shoulder screws. Door hardware shall permit emergency access from the outside of the partition. Doors for handicapped compartments shall be supplied with Accurate ADA paddle handles.</p> <p>2.06 Mounting Hardware—Chrome plated Zamac stirrup brackets shall be used to mount panels and pilasters. Mounting hardware shall be secured with vandal resistant screws.</p> <p>2.07 Construction Design—Partitions shall be anchored to floor with one piece-mounting fork and include integral leveling bolt to provide proper height adjustment. Floor anchoring system shall be concealed by a type 304 stainless steel trim shoe with a #4 finish, secured with two metal clips integrated into the floor anchor assembly. Aluminum headrail with anti-grip profile shall provide overhead bracing and span all partitions and brace the end pilaster to the back wall.</p>	<p>2.01 Doors, Panels, and Urinal Screens—Shall be 1" thick and fabricated from tension-leveled, cold rolled commercial quality 22 gauge galvanized steel, bonded to sound deadening honeycomb core.</p> <p>2.02 Pilasters—Shall be 1 1/4" thick, 82" high, and fabricated from tension-leveled, cold rolled commercial quality 22 gauge galvanized steel, bonded to sound deadening honeycomb core.</p> <p>2.03 Material—Doors, panels, pilasters and urinal screens shall be manufactured with a honeycomb core bonded to the steel with a non-toxic adhesive to ensure solid construction and sound attenuation. All four components shall be assembled with a continuous roll-formed interlocking crown molding, with the corners brazed and ground smooth.</p> <p>2.04 Finish—Doors, panels, pilasters, and urinal screens shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.</p> <p>2.05 Color—Shall be selected from Accurate's full range of standard designer colors.</p> <p>2.06 Door Hardware—Shall include bottom hinge with adjustable cam that permits door to return to a pre-set position when not locked. Hinge, strike and keeper shall be chromium plated Zamac to resist corrosion and through bolted with vandal resistant barrel nuts and shoulder screws. Door hardware shall permit emergency access from the outside of the partition. Doors for handicapped compartments shall be supplied with Accurate ADA paddle handles.</p> <p>2.07 Mounting Hardware—Chrome plated Zamac stirrup brackets shall be used to mount panels and pilasters. Mounting hardware shall be secured with vandal resistant screws.</p> <p>2.08 Construction Design—Partitions shall be anchored to floor with one piece-mounting fork and include integral leveling bolt to provide proper height adjustment. Floor anchoring system shall be concealed by a type 304 stainless steel trim shoe with a #4 finish, secured with two metal clips integrated into the floor anchor assembly. Aluminum headrail with anti-grip profile shall provide overhead bracing and span all partitions and brace the end pilaster to the back wall.</p>
PART 3: EXECUTION	<p>3.01 Installation—Material shall be installed in accordance to manufacturer's installation instructions with partitions rigid, straight and plumb. Doors and panels shall be mounted 12" above the finished floor.</p> <p>3.02 Warranty—Accurate Partitions Corp. guarantees its COLOR-THRU phenolic partitions, when properly maintained, against delamination, breakage, or corrosion for 10 YEARS from the date of receipt by the customer. If material is found to be defective during that period, the material shall be replaced free of charge. No credits or allowances shall be issued for any labor or expenses relating to the replacement of components covered under the warranty plan.</p>	<p>3.01 Installation—Shall be installed in accordance to the Accurate installation instructions with partitions rigid, straight and plumb. Doors and panels shall be mounted 12" above the finished floor.</p> <p>3.02 Warranty—Accurate Partitions Corp. guarantees its stainless steel partitions, properly maintained, against corrosion or discoloration for 5 YEARS from the date of receipt by the customer. If material is found defective during that period, the material shall be replaced free of charge. No credits or allowances shall be issued for any labor or expenses relating to the replacement of components covered under the warranty plan.</p>	<p>3.01 Installation—Shall be installed in accordance to the Accurate installation instructions with partitions rigid, straight and plumb. Doors and panels shall be mounted 12" above the finished floor.</p> <p>3.02 Warranty—Accurate Partitions Corp. guarantees its powder coated steel partitions, properly maintained, against chipping, flaking, cracking or discoloration for 3 YEARS from the date of receipt by the customer. If material is found defective during that period, the material shall be replaced free of charge. No credits or allowances shall be issued for any labor or expenses relating to the replacement of components covered under the warranty plan.</p>

ACCURATE Shower Dividers and Dressing Booths are strong and durable to hold up in public shower areas. ACCURATE offers materials that resist penetration by water, steam, mildew, odors and soap. The clean, modern design is attractive as well.

ACCURATE Dressing Booths enhance shower installations—available with door or curtain options. Choose from solid plastic, phenolic, stainless steel or powder coated steel materials.

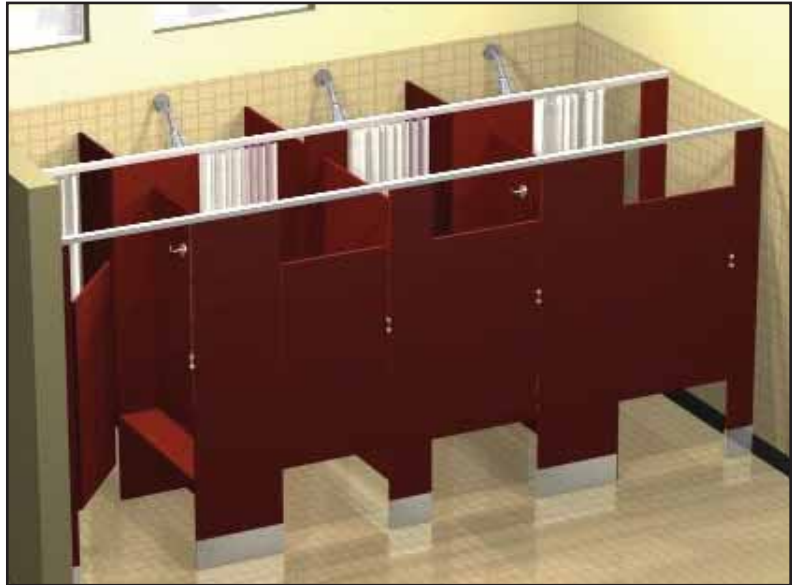

Accurate

Accurate Partitions Corp.

P.O. BOX 287, LYONS, IL 60534

Tel: 708-442-6800 • Fax: 708-442-7439

www.accuratepartitions.com

E-mail: info@accuratepartitions.com

ACCURATE's customer service group is ready to assist you with any and all needs!



ADA Code Requirements

ACCURATE has been a pioneer in the design of facilities for the physically challenged. Our engineers stand ready to assist in layout design to meet code or special requirements.

ACCURATE reserves the right to change specifications and product without notice. The color charts shown in this catalog are printed reproductions and are for descriptive purposes only. Color selection cards are available upon request.

© 2008 Accurate Partitions Corp.

D I S T R I B U T E D B Y :